



Applications

- Commercial Buildings
- Education
- Shopping Malls
- Atriums

Features

- Available in 3 sizes
- Dimmable
- Various colour finishes
- 3000K or 4000K
- High lumen output
- Integral gear
- Aluminium Housing
- Unique design

Technical Information

Product Specification	Type AH	Type AL	Type BH	Type BL	Type CH	Type CL
Size	250L x 250W x 1000H		250L x 250W x 500H		500L x 250W x 500H	
Power (Direct)	45W	25W	45W	25W	90W	50W
Drive Current	1200mA	700mA	1200mA	700mA	1200mA	700mA
Power (Indirect)	6W	6W	6W	6W	6W	6W
Downlight Lumen Output	5750lm	3500lm	5750lm	3500lm	11500lm	7000lm
Downlight Efficacy (lm/W)	128	140	128	140	128	140
Uplight Lumen Output	660					
Uplight Efficacy (lm/W)	110					
Colours	3000K - 4000K					
CRI	>80 - >90					
Control	DALI - 0-10V - Casambi					
IP Rating	IP20					
Mounting	Wire Suspension - Up to 3m					

*Above data is based on 4000K 80CRI

Product Selector

LAN-A-H-840-D-W-BL

Product Specification

250x250x1000
250x250x500
500x250x500

Power

High
Low

Colour

3000K (80CRI)
3000K (90 CRI)
4000K (80CRI)
4000K (90 CRI)

Control


DALI
0-10V
Casambi

Finish (Body Colour)


White
Black
Grey
Red
Yellow
Green
Blue

Finish (Reveal Colour)


White
Grey
Red
Yellow
Green
Blue

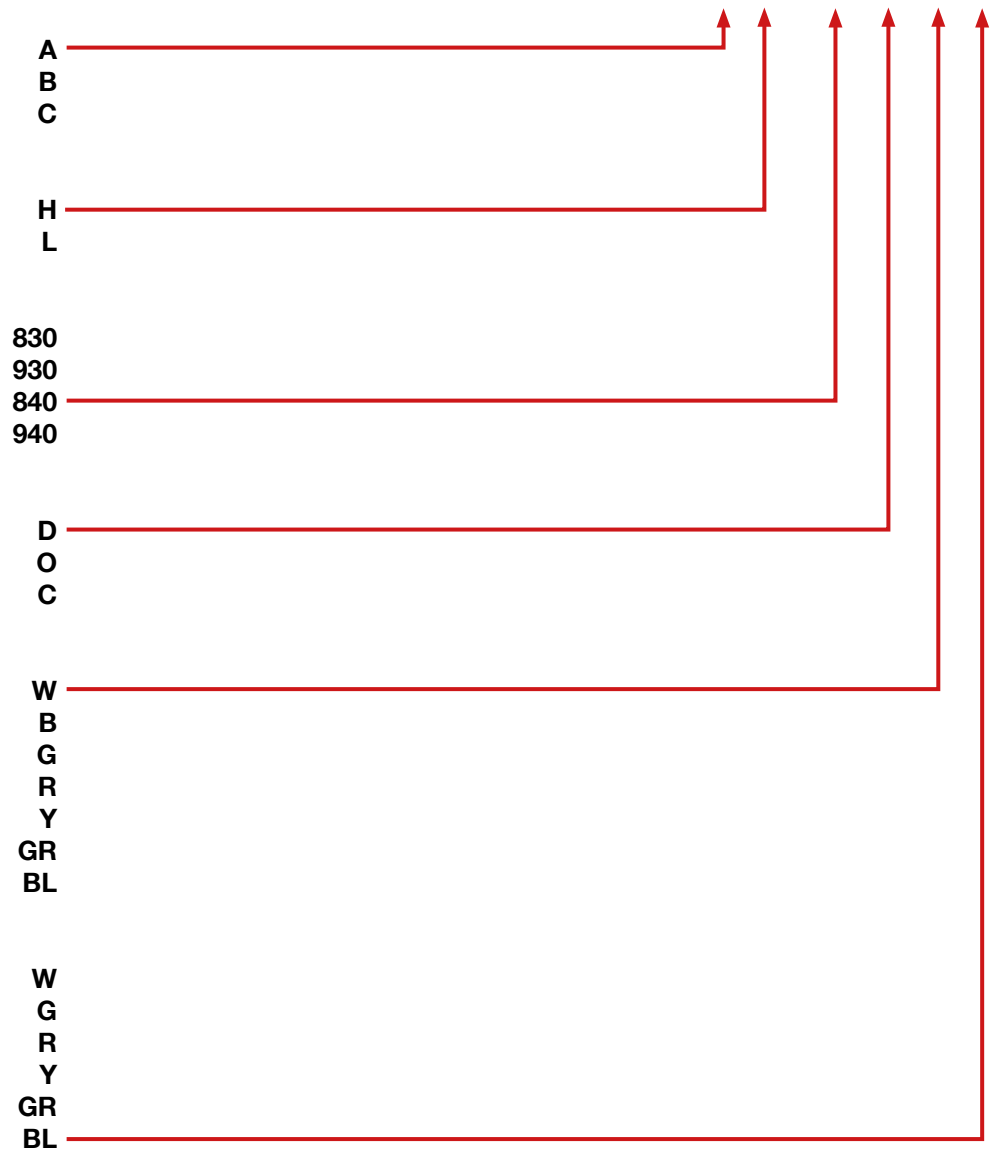


Specification Drawings

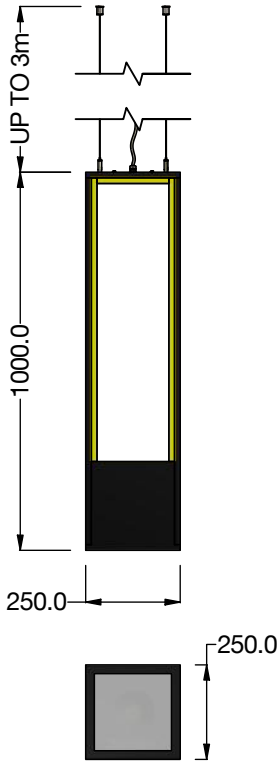



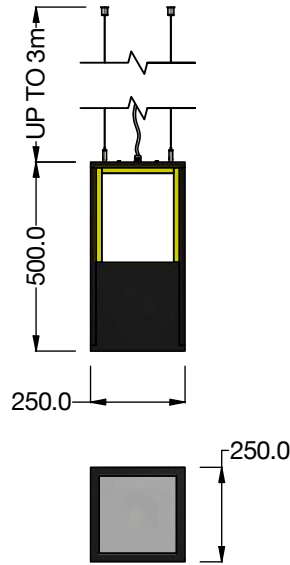

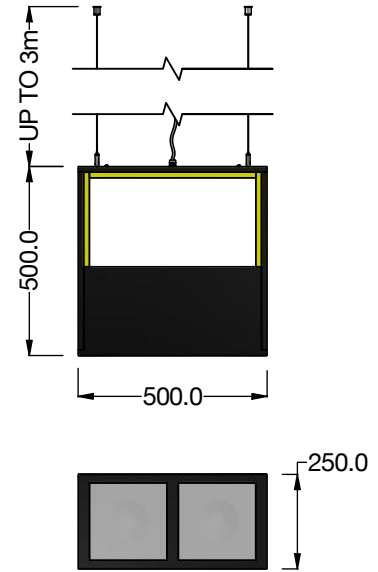


TYPE A



TYPE B



TYPE C

Please contact our sales team on **+44(0)113 263 9039** for further assistance

Specifications are subject to change without prior notice. Please refer to our website for most up to date version

Rev 02- 04/20

